

Key Functions

- IE browser based de-warp: ceiling, wall, corridor modes including quad view
- Video Analytics: Intelligent Motion Detection, Intrusion and Tamper Detection
- Quad Stream (H.264/H.265, MJPEG) for simultaneous access to lo and hi res
- Onvif Profile S for compatibility with existing NVRs or software
- Easy Installation with IP Discovery software for Windows or Bonjour for Mac
- Full support for Internet Explorer, partial support for other browsers
- Event Boosting, FTP Image Upload, Open VPN, QoS, IP Filtering
- Event Buffering for showing video prior to motion detection or other event

Other Models in this series

- **HTNC4300DM** (3 Megapixel super wide angle micro dome with de-warp)
- **HTNC5803M, HTNC5803DM** (4K / 8 Megapixel bullet and dome)
- **HTNC5404M, HTNC5404DM** (4 Megapixel bullet and dome)
- **HTNC5830XIR** (IR PTZ, 30 x zoom, 4K / 8 MP, extended IR 1000 ft night vision)


Software

- Includes free Titanium 256 camera viewing software for PC and Mac (requires Sharx Security NVR for recording)
- Supports Milestone VMS (free for 8 cameras, any resolution, no time limit)
- Supports 16 Camera Blueiris on PCs, 16 camera SecuritySpy on Mac
- Supports Luxriot, Genetec, Aimetis, SightHound, IPTimeLapse, VLC

Optional Sharx Accessories

- **HWB** downward facing wall bracket, compatible with pole mount **HCPM**
- **HWB4** sconce type downward facing wall bracket, new style narrow mount
- **HPM** chandelier style ceiling pendant mount
- **HCB** indoor / outdoor conduit box, round, compatible with pole mount **HCPM**
- **HCPM** heavy duty pole mount / corner mount, requires **HCB** or **HWB**
- **HTCP2701:** PoE power + networking for up to 1.5 miles range over coax
- **HTNR16621:** 480 fps 16-camera 4K NVR (16 PoE), up to 24 TB storage
- **HTNR32620:** 960 fps 32-camera 4K NVR (16 PoE), up to 48 TB storage
- **HTVM64600:** 1920 fps 64-camera 2/4/8 NVR link, up to 48 TB offsite storage
- **HTVM80600S:** 3840 fps 128-camera 2/4/8 NVR link, up to 96 TB offsite storage

Dimensions

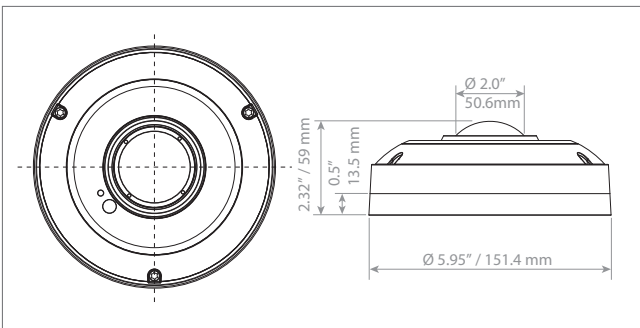

Sharx HTNC6000D

4K / 12 Megapixel Indoor/Outdoor Day/Night Panoramic Fish-Eye

Key Features

- Ultra 4K / 9 Megapixel Resolution @ 30 fps, 12 Megapixel @ 20 fps, H.264 or H.265
- 1.9mm 180° Panomorphic Lens
- True Day & Night
- Wide Dynamic Range (color during the day, black & white with IR at night)
- 6 IR LEDs for up to 30 ft / 10m night vision in total darkness
- Connectors for Audio In/Out (1/1), Alarm In/Out (1/1)
- Solid metal construction, easy installation
- Mounts directly to ceiling. Indoor/outdoor conduit box and other optional mounts available: chandelier style pendant mount, sconce style wall mount, pole and corner mount
- MicroSDHC or MicroSDXC card up to 256 GB
- PoE, 12VDC (power supply not included, can be powered by Sharx Security NVR)

Technical Specifications

Model	HTNC6000D	
IMAGE		
Lens	Fixed 1.29mm, F2.4	
Angle of View	180° (ultra wide wide angle, fish-eye)	
Image Sensor	Type	1/1.7" Sony STARVIS CMOS Sensor
	Pixels	4000 (H) x 3000 (V)
Min. Illumination	Color : 0.09 Lux @F2.4 (40IRE) / BW : 0 Lux@ F2.4 (IR LED On)	
Scanning Mode	Progressive Scan	
Wide Dynamic Range	WDR, 3 levels (low, medium high)	
Day and Night Mode	True Day & Night (Auto, Day, Night)	
Noise Reduction	3DNR	
Digital Zoom	Yes	
Exposure Control	Auto	
White Balance Control	Auto, Manual	
Metering Mode	Spot, Center, Average, Left, Right, Bottom	
Image Effect	Flip, Mirror, Defog	
Flicker Free Mode	50Hz, 60Hz	
Shutter Speed	Auto(1/20,000 to 1sec), Manual	
	Quantity	6 IR LEDs, adjustable strength
IR Illuminator	Angle	180°
	Distance	Up to 30 ft / 10 m IR night vision in total darkness
Motorized Lens Control	No	
VIDEO/AUDIO		
Compression	H.264/H.265 (Baseline, Main, High Profile), MJPEG	
Bitrate Control	CBR, CVBR	
Resolution	4000x3000, 3000x3000, 2560x2560, 2160x2160, 2048x2048, 1280x1280, 640x640, 480x480	
Frame Rate	Max 30 fps @ up to 3000 x 3000 resolution, 20 fps @ 4000 x 3000	
Streaming	Quad Stream : H.264 / H.265x3, MJPEGx1	
Composite Out	Yes with optional cable (special order only)	
Audio Compression	G.711 (with user supplied external amplified microphone)	
Audio Streaming	2 Way (with user supplied external amplified speaker)	
SYSTEM		
Video Analysis	Intelligent motion detection, intrusion detection, tampering	
Motion Detection Area	16 Programmable Areas (8 Include Areas, 8 Exclude Areas)	
Privacy Zones	8 Privacy Zones	
Email Attachment or FTP Upload	JPEG	
Event Notification	E-mail, FTP, Notification Server, XML Notification, Audio Alert, AIHM	
Audio Alert	User-Defined 3 Audio Files	
Login Authority	Administrator, Operator, Guest	
Event Buffering	FTP	Pre : 30sec, Post : 30sec
	SD Record	Pre : 10sec, Post : 60sec
Manual Trigger	4 Programmable Triggers	
Security	Multi User Authority, IP Filtering, HTTPS, SSL	
Network Time Sync	NTP Server, Synchronized Computer, Manual	
Software Reset	Restart, Reset, Factory Default	
Hardware Factory Reset	Yes	
Auto Recovery	Backup, Restore	
Remote Upgrade	Yes, through web browser, SmartManager or Titanium software	
SD Recording Mode	Event, Continuous	
NETWORK		
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour, OpenVPN	
Client Software	Internet Explorer, Titanium, Milestone, LuxRiot, Blueiris, SecuritySpy, VLC	
Max. User Connection	Live : up to 10 Users, Playback : up to 3 Users	
API Support	Open API, Onvif Compliance	
Mobile Support	Mobilinc, tinyCam, ONVIF compatible apps, free Titanium for use with NVR	
EXTERNAL IN/OUT		
Audio	1 Input, 1 Output(Terminal Block)	
Alarm	1 Input, 1 Output(Terminal Block)	
Ethernet	RJ-45 Fast Ethernet (10/100)	
u-SD Card	MicroSDHC, MicroSDXC (Max 256GB, class 10 or faster)	
ETC		
Operating Humidity	0 to 100%RH (Weatherproof in rain, snow, ice conditions)	
Operating Temperature	-4 to +120 degrees Fahrenheit (-20 to +50 °C)	
Power Supply	PoE (802.3af compliance), 12VDC	
Power Consumption	260mA (12.5 W) @ PoE / 1.2A (15 W) @ 12VDC	
Dimension	5.95" (dia) x 2.32" (Height) / 151 mm (dia) x 59 mm (H)	
Net Weight	Approx. 1.5 lbs (0.69 kg)	
Ingress Protection	IP66	



www.sharxsecurity.com
info@sharxsecurity.com

Copyright © 2019 Sharx Security, Inc. All rights reserved.

Specifications are subject to change without notice.